

115, 2Ba, Jeongwang-Dong, Shiheung-Si, Kyungki-Do, Korea. Phone: (031)499-6446 Fax: (031)499-6448


[1] Preparation For Installation By Customer

*.Color Foucs-III(DLF-120)

- 1) Air Compressor 5kg/cm² (= 5 bar) = Must be free of water & Humidity
- 2) Tube For Air Compressor: 8mm Uretan Hose(Outer Diameter)
- 3) Water Supply Need 1 Line: 15mm(Outer Diameter)
 Must be well filtering
- 4) Water Drain Need 2 Line: 25mm(Outer Diameter)

 Maximum Height is 10cm from earth.

 .Should be Lower than Outlet of Color Foucs-3 Drain.
- 5) Power Supply : 220V 1Φ, 50Hz, 4Kw More, AVR(=Stabilizer)

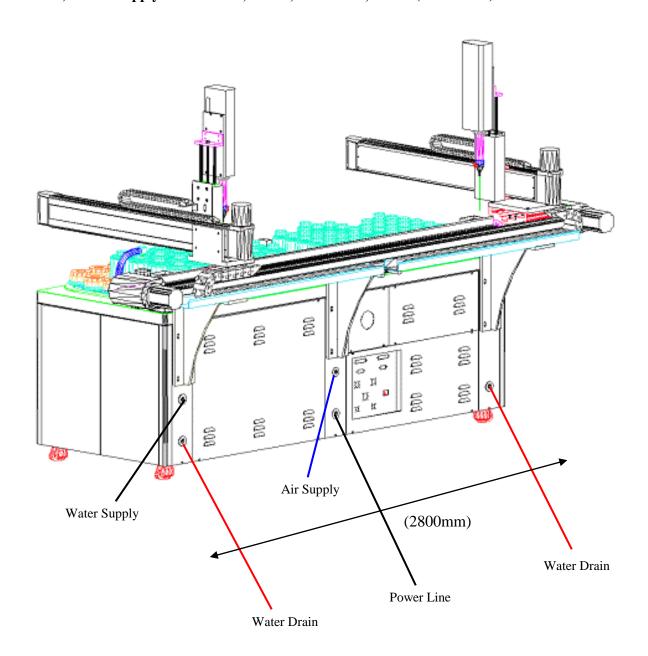



115, 2Ba, Jeongwang-Dong, Shiheung-Si, Kyungki-Do, Korea. Phone: (031)499-6446 Fax: (031)499-6448

COMPUTER

- 1) CPU 3.0GHz
- 2) Mother Board
- 3) LAN Card Board (Recommend : Separate from Mother Board)
- 4) Memory Min. 8.0Giga
- 5) OS Windows 7 or 8 Professional English (Original)
 Must Installed SQL Server 2012 from M/s
- 6) System: 64 Bit
- 7) RS232 9 Pin Board in Computer
- 8) Monitor: 21Inch. Resolution(1920 x 1080 Pixel)
- 9) Printer HP Ink Jet (Recommend Brand)
- 10) UPS For Computer: 3.5A in 50Hz Essential

*.Dye Focus

1) Water Supply Need 1 Line: 15mm(Outer Diameter)

Must be well filtering

2) Water Drain Need 1 Line: 15mm(Outer Diameter)

Maximum Height -- 10cm from earth.

3) Power Supply - 220V 1Φ, 50Hz, 3Kw More, AVR(=Stabilizer)





Magnetic Stirrer